



# Sujetacables Punta de Flecha



Tolerance unspecified  
mm (inch)  
X.XXX ±0.1 (0.004)  
X.XX ±0.25 (0.010)  
X.X ±0.5 (0.02)  
X. ±1.0 (0.04)  
ANGULAR ± 2°

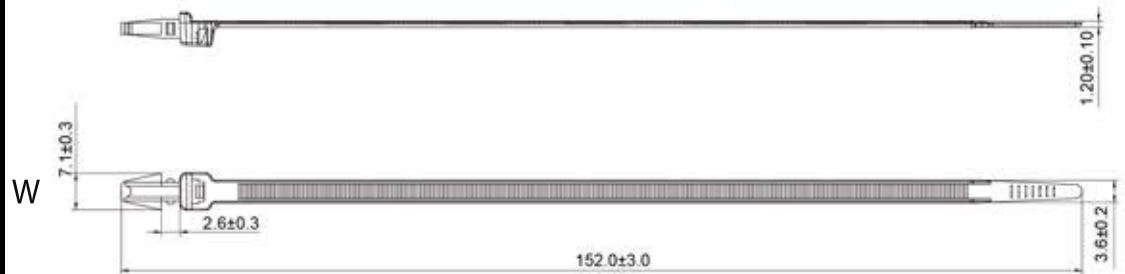

L

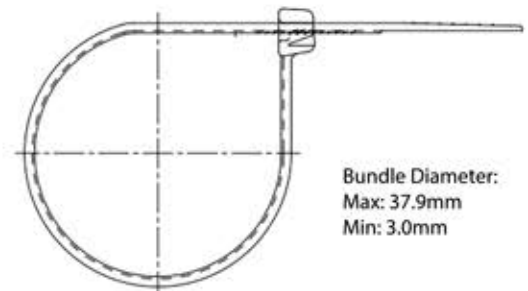

Tensile Strength: 18kgs  
Min hole size:4.5mm  
max panel thickness:2.5mm

Bundle Diameter:  
Max: 37.9mm  
Min: 3.0mm

- 1.MATERIAL Natural: Polyamide 6.6 natural
- 2.MATERIAL Black:Polyamide 6.6 natural+ ~1% carbon black
- 3.Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
- 4.Installation temperature: -10° C ÷ +85° C
- 5.Working temperature: -40° C ÷ +85° C
- 6.Max sustainable temperature for short time: +110° C
- 7.Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
- 8.Carbon black addition gives a better UV resistance
- 9.Comply with EN62275



Referencia		Empaque: 1000 Piezas		
Natural	Negro	Largo "L" mm. / Pulg.	Ancho "W" mm. / Pulg.	Máx. Tensión Lbs. / Kgs.
EQPM-15036	EQPM-15036BK	152 / 5.9"	7.1 / 0.27"	39.6 / 18
EQPM-20048	EQPM-20048BK	200 / 8"	9 / 0.35"	50 / 23